
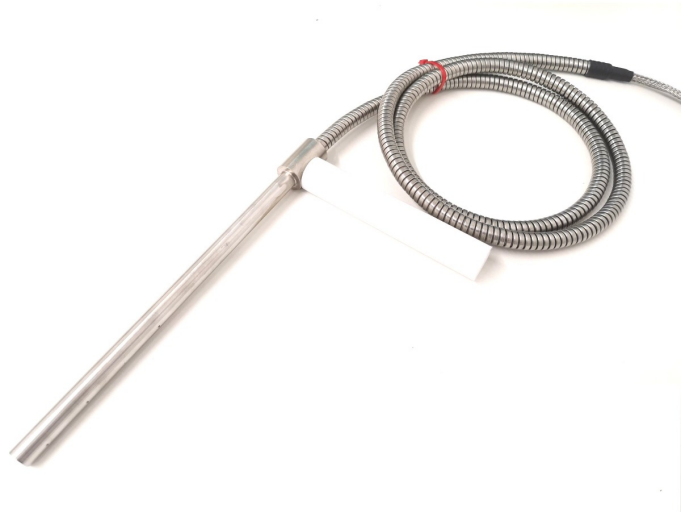


Meltflow Index Testing Kit and ISO17025 System Calibration Certificate

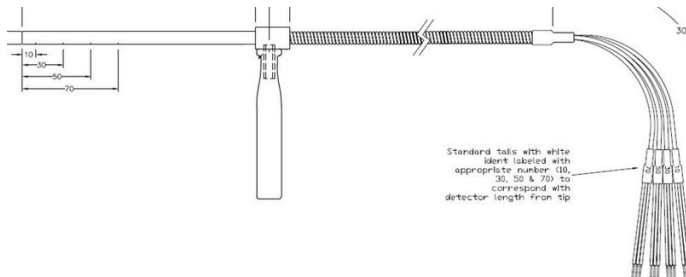

[Click here to view product](#)

Product Code	XE-KITMFI
General Description	Meltflow Index Machines (MFI). Sensors with 4 point measuring points
Accuracy	$\pm 0.06^{\circ}\text{C}$ @ 0°C
Cable Length	1.3m
Cable Type	Stainless Fixable Armour and PTFE insulated screened lead
Core / Strands	7/0.2mm
Max. Temperature	400°C
Min. Temperature	20°C
Probe Diameter	9.4mm
Probe Length	170MM

Sensor Type	1/3 Din (100 Ohms @ 0°C)
Sheath Material	Stainless steel 316 sheath
Cable Connection	3-Wire current
Calibration	ISO17025 (UKAS) calibration @220, 230, 240°C
Termination Type	Bare tails