


Stainless Steel Sheathed Pt100 Sensor - Type PRT

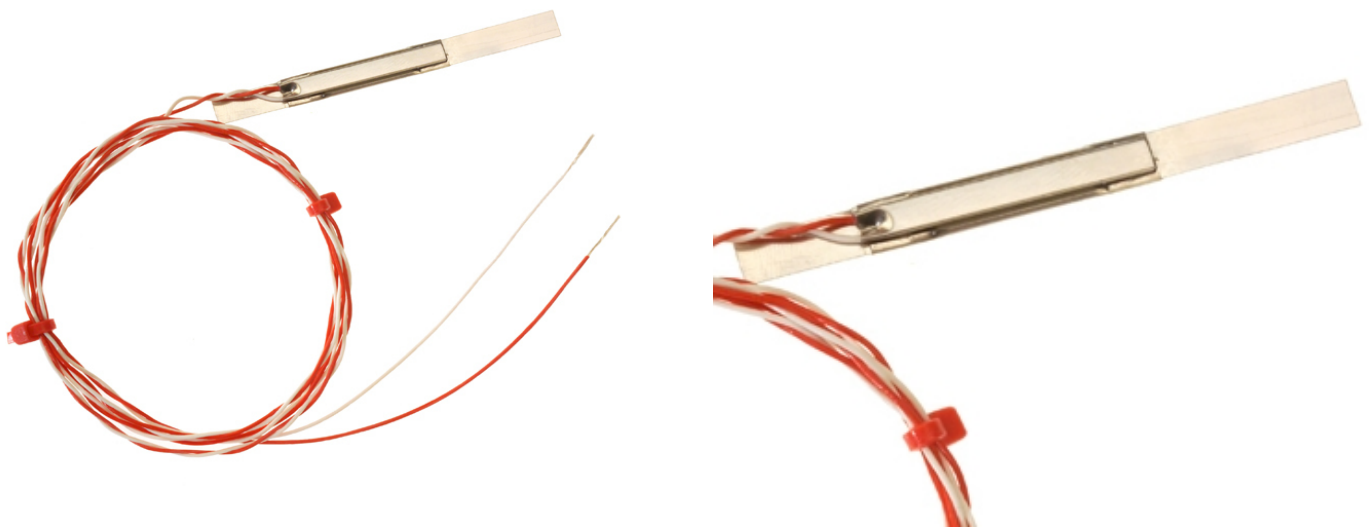

General Description	Sheathed Pt100 element in a thin, flat stainless steel body
Sensor Type	Quick thermal response while element remains protected
Element	Pt100
Cable Length	1m
Cable Type	Teflon® insulated twin twisted lead
Core / Strands	7/0.2mm
Cable Termination	Bare Tails
Max. Temperature	+250°C
Min. Temperature	-50°C
Accuracy	Class B
Number of Wires	2