


100 Ohm Wire Wound Detectors

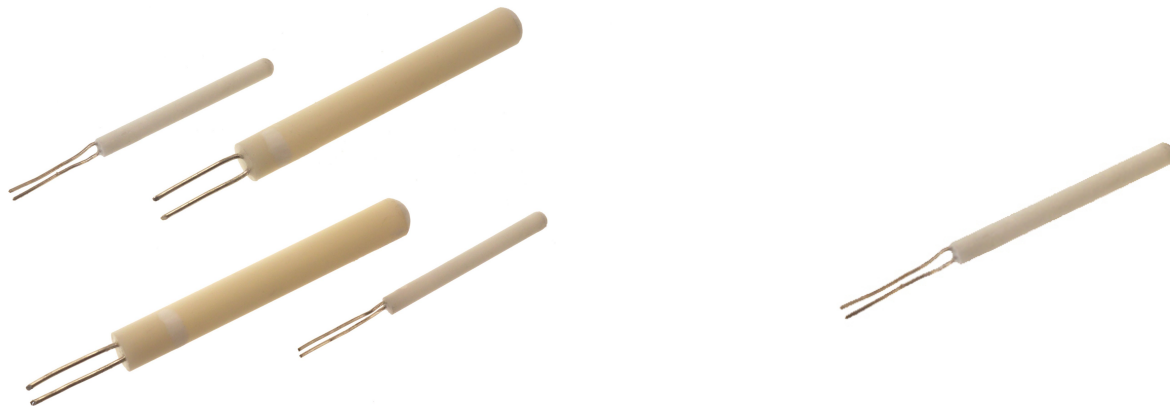

General Description	Wirewound construction for optimum performance and stability
Sensor Type	Pt100 Single Element
Max. Temperature	+650°C
Min. Temperature	-200°C
Tolerance	Class A, Class B or 1/10 DIN. 1/10DIN relative to IEC 60751 over the range 0°C to 150°C (1/10 of Class B)
Detector Dimensions	Various width / length combination available