


PFA Insulated Bare Tails ANSI - Type K,T





Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

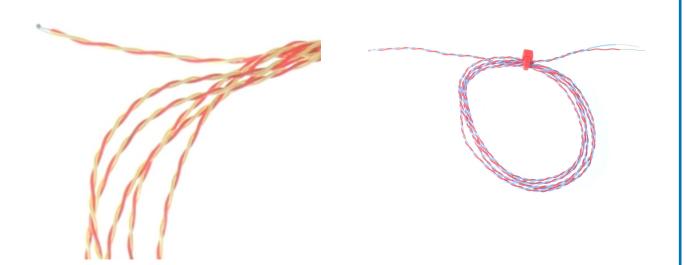

Need Your Temperature Sensor calibrated?

Traceable to ISO17025 (UKAS) calibration standards, Labfacility offer a choice of a 3 or 5 point traceable calibration using our in-house calibration facility.

Please be aware that if you add a calibration option to your order you will be contacted regarding delivery information.

Specifications

Specifications

General Description	Fast response, welded exposed junction
Thermocouple Type	K or T
Thermocouple Junction	Exposed
Cable Length	300mm, 1, 2, 5 or 10 metre
Cable Type	Teflon® PFA insulated twin-twisted lead
Core / Strands	1/0.2, 1/0.3mm solid or 7/0.2mm stranded
Cable Termination	Bare wire
Max. Temperature	+250°C
Min. Temperature	-75°C
Standards Met	ANSI MC96.1