



Type E PFA Insulated Flat Pair Thermocouple Cable / Wire (IEC)

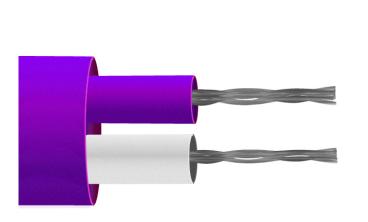

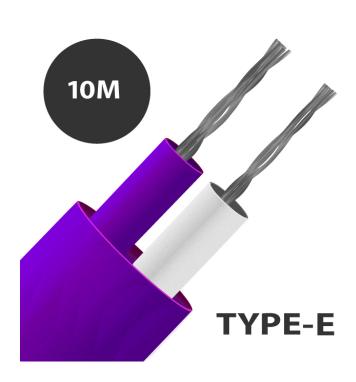

Click here to view product

XE-2440
Resistant to oils, acids other adverse agents and fluids. Good mechanical strength and flexibility. PTFE better for steam/elevated pressure environments.
10m, 25m, 50m, 100m, 200m
Single pair of PFA insulated conductors, laid flat with PFA jacket
7/0.2mm
0.219
Purple
Purple
White





Drain Wire	No
Insulation Material	PFA Insulated
Loop Resistance 7/0.2 (Ohms per combined metre)	5.3
Max. Temperature	+260°C
Min. Temperature	-75°C
+ Conductor	Nickel Chromium
- Conductor	Constantan
Screen	No
Standards Met	Colour code (cores & jacket) to IEC-584-3
Thermocouple Type	E
Tolerance	Class 1