



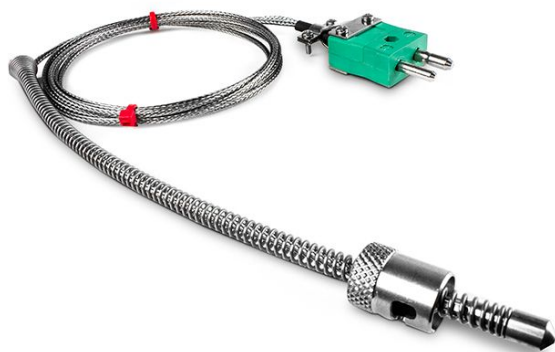

**LABFACILITY**  
TEMPERATURE & PROCESS TECHNOLOGY

## **IEC Adjustable Bayonet Thermocouple, Glassfibre Stainless Steel Overbraided Cable - Type K - Standard Plug Termination with Cable Clamp - 2M**

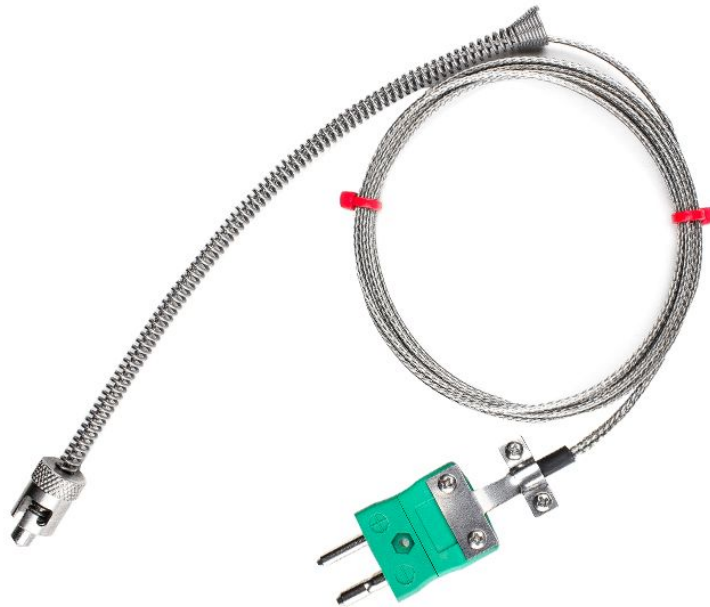

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

**Specifications****Specifications**

|                              |                                                          |
|------------------------------|----------------------------------------------------------|
| <b>Product Code</b>          | XE-5624-001                                              |
| <b>General Description</b>   | Thermocouple with adjustable insertion depth             |
| <b>Sensor Type</b>           | 6.0mm diameter tip                                       |
| <b>Thermocouple Type</b>     | K                                                        |
| <b>Thermocouple Junction</b> | Grounded tip for fast response                           |
| <b>Cable Length</b>          | 2M                                                       |
| <b>Cable Type</b>            | Glassfibre insulated lead with stainless steel overbraid |
| <b>Core / Strands</b>        | 7/0.2mm                                                  |
| <b>Termination Type</b>      | Standard Plug                                            |
| <b>Max. Temperature</b>      | 350°C                                                    |
| <b>Min. Temperature</b>      | -60°C                                                    |
| <b>Standards Met</b>         | IEC-584-3                                                |
| <b>Bayonet cap</b>           | 11.5mm I.D. single slot                                  |
| <b>Connector Type</b>        | Plug                                                     |
| <b>Connector Size</b>        | Standard                                                 |
| <b>Thread</b>                | M6 x 1mm thread                                          |
| <b>Spring</b>                | 200mm                                                    |