


°Cal-check PRO General Industrial Hand Held Precision Thermocouple Calibrator

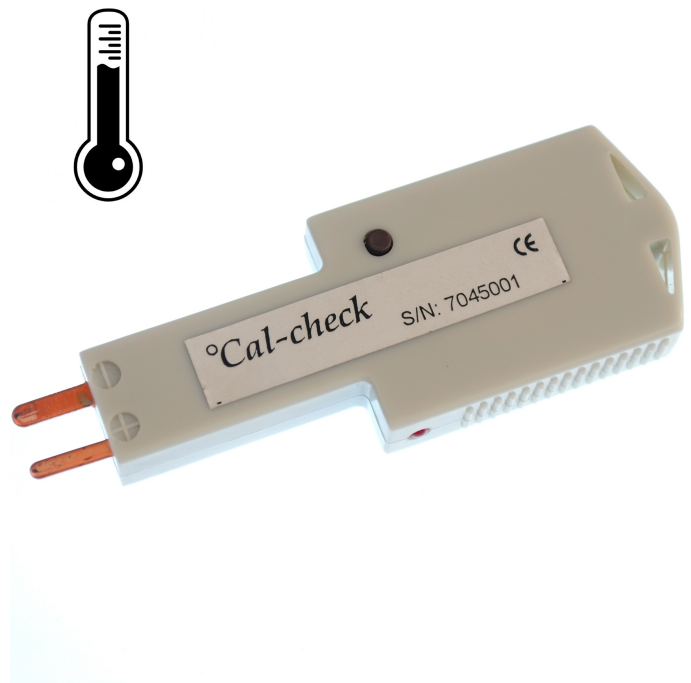

[Click here to view product](#)

Product Code	XE-4176
General Description	Accurate calibration of thermocouple instruments ?better than +/-10uV. Plug-in, press button & read ? no PC needed
Type	Thermocouple Type K
Accuracy	+/-0.25°C at 23°C ambient temperature
Resolution	0.1°C
Host Instrument Input Impedance	10k Ohm minimum
Temperature Coefficient	18-28°C ambient temperature, better than +/-0.5°C 0-50°C ambient temperature, +/-0.5 °C
Storage Temperature Range	-20 to 70°C

Ambient Operating Temperature	0 to 50°C, 18 to 28°C recommended
Power Consumption	Battery life: typically 2400 operations; 5 years? shelf life
Power Supply	CR2032; 3V 230mAh
Standards Met	Thermocouple Type K to IEC584. Moulded Case to IP50
Accessories	Supplied with a traceable certificate of calibration