
Thermocouple Cable / Wire Type U PVC Insulated Flat Pair (BS)

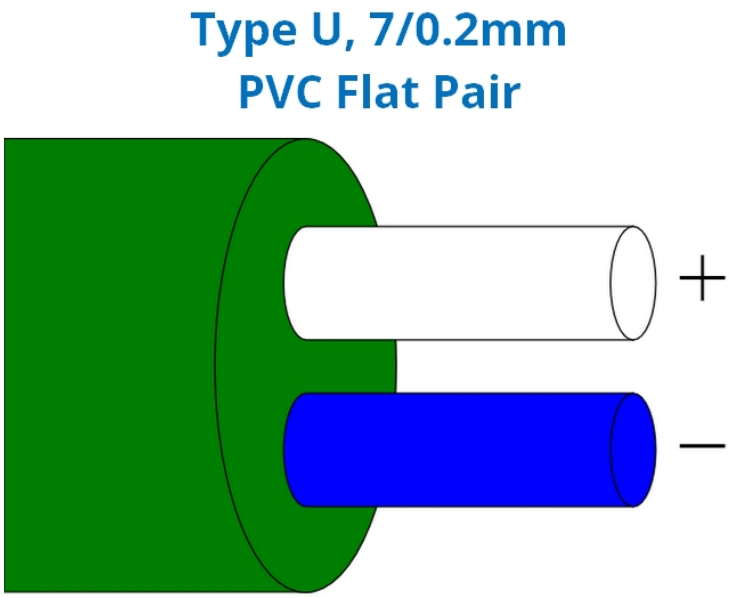

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

Datasheet

Thermocouple Cable / Wire Type U PVC Insulated Flat Pair (BS)

Image is for colour coding illustration only

Price is per metre - please add required quantity for basket. Only 1,155 metres left in stock

Compensating cable resembles the thermoelectric characteristic of the relevant thermocouple over a limited ambient temperature range, 0° to 80°C typically. Since these cables are made from low cost materials, cost savings can be achieved on plant installations compared with running true thermocouple extension cable.

Specifications

Specifications

Product Code	WU-001-D
General Description	Good general purpose insulation for 'light' environments. Waterproof and very flexible.
Cable Length	Priced per metre
Cable Type	Flat pair construction
Core / Strands	7/0.2mm
Conductor Cross Section 7/0.2 (mm2)	0.219
Outer Colour	Green
+ Colour	White
- Colour	Blue
Insulation Material	PVC Insulated

Loop Resistance 7/0.2 (Ohms per combined metre)	4.5
Max. Temperature	+105°C
Min. Temperature	-10°C
Standards Met	BS
Thermocouple Type	U
Tolerance	Class 2