


Thermocouple Cable / Wire Type U PVC Insulated Flat Pair (BS)

Type U, 7/0.2mm PVC Flat Pair



Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

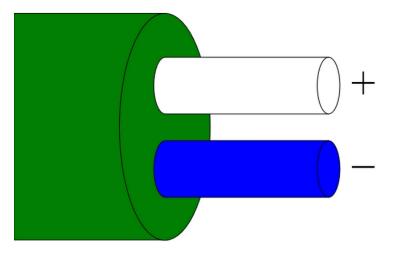

Thermocouple Cable / Wire Type U PVC Insulated Flat Pair (BS)

Image is for colour coding illustration only

Price is per metre - please add required quantity for basket. Only 1,155 metres left in stock

Compensating cable resembles the thermoelectric characteristic of the relevant thermocouple over a limited ambient temperature range, 0° to 80°C typically. Since these cables are made from low cost materials, cost savings can be achieved on plant installations compared with running true thermocouple extension cable.

Specifications

Specifications

| Product Code | WU-001-D |
|-------------------------------------|---|
| General Description | Good general purpose insulation for 'light' environments. Waterproof and very flexible. |
| Cable Length | Priced per metre |
| Cable Type | Flat pair construction |
| Core / Strands | 7/0.2mm |
| Conductor Cross Section 7/0.2 (mm2) | 0.219 |
| Outer Colour | Green |
| + Colour | White |
| - Colour | Blue |
| Insulation Material | PVC Insulated |



| Loop Resistance 7/0.2 (Ohms per combined metre) | 4.5 |
|---|---------|
| Max. Temperature | +105°C |
| Min. Temperature | -10°C |
| Standards Met | BS |
| Thermocouple Type | U |
| Tolerance | Class 2 |