




LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

0.25mm Diameter Fast Response Mineral Insulated Thermocouple with Plain Pot & PFA ANSI Tails - Type K - Insulated Junction - 250mm Length

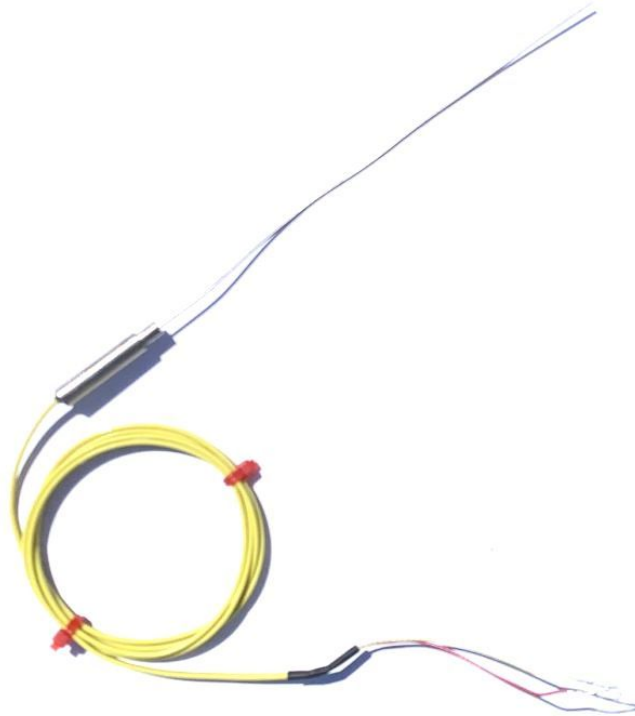

Labfacility are the UK's leading manufacturer of Temperature Sensors, Thermocouple Connectors and associated Temperature Instrumentation and stockings of Thermocouple Cables. The Company has been trading since 1971 and is ISO9001 accredited.

[custom sensor form](#)

Please use our
s to submit your requirements for various lengths of MI and Cable lengths.

Need Your Temperature Sensor calibrated?

Traceable to ISO17025 (UKAS) calibration standards, Labfacility offer a choice of a 3 or 5 point traceable calibration using our in-house calibration facility.

Please be aware that if you add a calibration option to your order you will be contacted regarding delivery information.

Specifications

Specifications

Product Code	XE-0905-001
General Description	Highly flexible, sheath can be bent/formed to suit many applications and processes
Sensor Type	Type K ANSI MA STYLE probes 0.25mm
Thermocouple Junction	Single element insulated junction
Probe Length	250mm
Sheath Material	Stainless steel 316 sheath
Pot Type	Plain pot seal (200°C)
Cable Length	500mm
Cable Type	PFA insulated lead
Core / Strands	7/0.2mm
Cable Termination	Flat pair with tails
Max. Temperature	260°C
Min. Temperature	-40°C
Tolerance	A 1%+ Length Tolerance applies